

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2001 (01.03.2001)



PCT

(10) International Publication Number
WO 01/13750 A1

- (51) International Patent Classification⁷: A42B 3/24 (74) Agent: JORRITSMA, Ruurd; Nederlandsch Octrooibureau, Scheveningsweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL).
- (21) International Application Number: PCT/NL00/00589
- (22) International Filing Date: 24 August 2000 (24.08.2000) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data: 1012896 24 August 1999 (24.08.1999) NL
- (71) Applicant (*for all designated States except US*): DEREK'S PATENT B.V. [NL/NL]; P.O. Box 412, NL-8300 AK Emmeloord (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): ARNOLD, Derck, Weslie [GB/NL]; Jupitersstraat 26, NL-8303 ZV Emmeloord (NL).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.

[Continued on next page]

(54) Title: VISOR ASSEMBLY

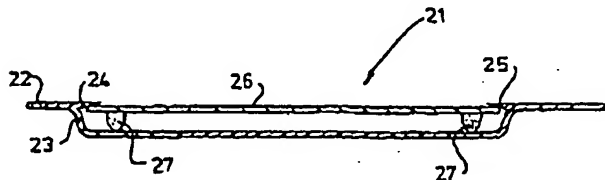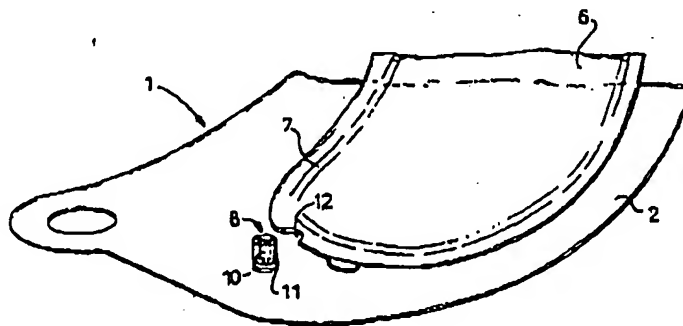

(57) Abstract: Visor assembly (1, 21) consisting of an inner shield (6, 26) and an outer shield (2, 22). In the use position these shields are some distance apart. With this arrangement the inner shield (6, 26) is located within the peripheral confines of the outer shield (2, 22). The inner shield (6, 26) is provided with an elevation (7, 27) which extends close to the periphery thereof and which acts as a spacer with respect to the outer shield. This elevation (7, 27) is preferably made of silicone material which is stuck to the inner shield (6, 26) but is not stuck to the outer shield (2, 22). Fixing to the outer shield (2, 22) takes place by means (10, 12) of mechanical fixing means.

WO 01/13750 A1